

KUKA




KR CYBERTECH.

For space-saving cell concepts.



_Low payloads

click for more

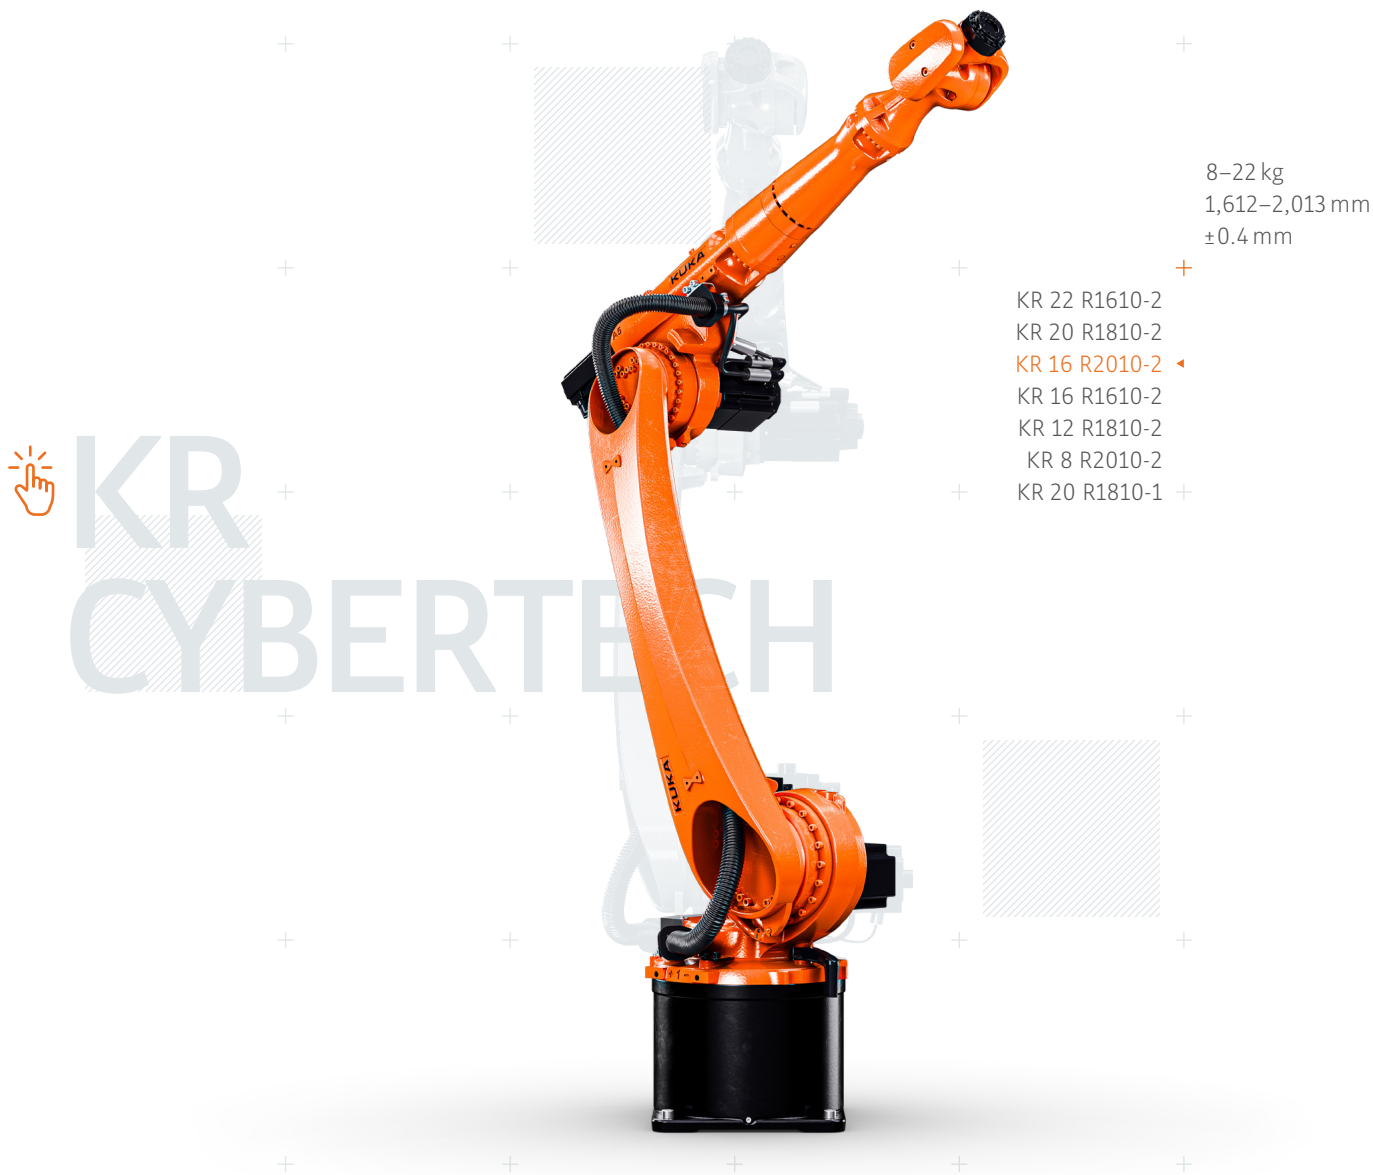

KR CYBERTECH

The specialist for handling applications. The industrial robots of the KR CYBERTECH family represent the world's largest range of models in the low payload category with the greatest power density. They are ideally suited to space-saving cell concepts and provide top performance – with particularly low follow-up costs.

The powerful multifunction robots of the KR CYBERTECH series are specially designed for handling applications: handling of large components, machining, assembling, palletizing and ARC welding. A central innovation of the KR CYBERTECH series: the industrial robots are even more compact. This enables you to benefit from the greater integration density and reduced disruptive contours. Choose the right industrial robot for every application from the wide-ranging portfolio.

Fast and accurate. The industrial robots of the KR CYBERTECH series reach exceptionally high speeds, allowing them to work even faster – without any loss of precision.

Extensive portfolio. The KR CYBERTECH series is suitable for handling large components, machining, assembly, palletizing and ARC welding.

Flexible installation. For planning security and low costs in the design of cells: the robots can be flexibly floor-, wall- or ceiling-mounted or even installed at a certain angle.


Variety of energy supply systems. Separation of the cable set and the dress package means that you can choose from a large variety of compatible energy supply systems.

Streamlined design. The KR CYBERTECH family is set apart by a streamlined wrist and an extremely compact and athletic appearance.

Improved motion characteristics. The optimized controller structures make for smooth and sensitive motion characteristics – on the path and during positioning.



The space-saving and intelligently integrated cabling ensures that the KR CYBERTECH robots have maximum freedom of motion in any installation position.

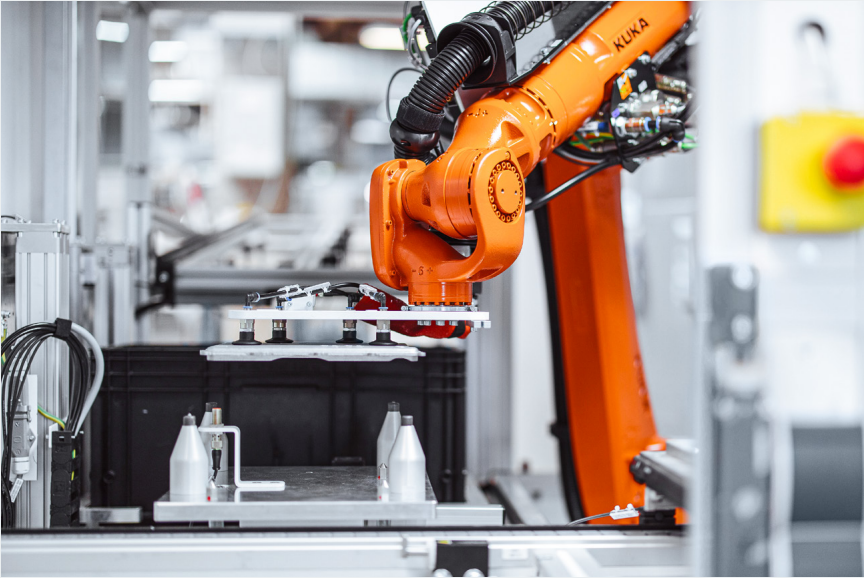

KR CYBERTECH	KR 22 R1610-2	KR 20 R1810-2	KR 16 R2010-2	KR 16 R1610-2	KR 12 R1810-2	KR 8 R2010-2	KR 20 R1810-1
Number of axes	6	6	6	6	6	6	6
Rated payload	22 kg	20 kg	16 kg	16 kg	12 kg	8 kg	20 kg
Reach	1,612 mm	1,813 mm	2,013 mm	1,612 mm	1,813 mm	2,013 mm	1,813 mm
Pose repeatability	±0.04 mm	±0.04 mm	±0.04 mm	±0.04 mm	±0.04 mm	±0.04 mm	±0.04 mm
Weight	255 kg	255 kg	260 kg	255 kg	255 kg	260 kg	250 kg
Variants	–	–	–	–	–	–	CR, F, HO
Installation position	Floor, ceiling, wall, angle	Floor, ceiling, wall, angle	Floor, ceiling, wall, angle	Floor, ceiling, wall, angle	Floor, ceiling, wall, angle	Floor, ceiling, wall, angle	Floor, ceiling, wall, angle

CR Suitable for cleanrooms **F** Foundry variant **HO** Food-compatible lubricants

The technical data in the table applies exclusively to standard versions.



-  kuka.com/contacts
-  facebook.com/kukaglobal
-  youtube.com/kukarobotgroup
-  linkedin.com/company/kukaglobal
-  instagram.com/kukaglobal

27.05.2026

Details provided about the properties and usability of the products are purely for information purposes and do not constitute a guarantee of these characteristics. The extent of goods delivered is determined by the subject matter of the specific contract. No liability accepted for errors or omissions. Subject to alterations. © 2026 KUKA